

DINMTT

FLUSH MOUNT TOUCH SENSITIVE
PUSH BUTTON

DINMTT is a request-to-exit switch

- It will work independently (standalone) or can equally be connected via a controller to provide exit from a secured area (Push Button Input).


FEATURES

- Feather light touch control
- Works in Pulse and Latch mode
- Ideal for a wide range of applications
- Front dual light indication
- Buzzer sound on every touch

SPECIFICATIONS

- Input voltage: 12-24 V DC; 15-24 V AC
- Current consumption: 65mA max.
- Relay Output: 2 A/24 V AC/DC
- Indicators-LED: Normal - Red, Relay Operation - Green
- Operating Temperature: -20°C to 50°C
Humidity 5-80% (non-condensing)
- Colours: Silver, Charcoal, and White
- IP Rating: IP40
- Weight: ~150 g

DIMENSIONS

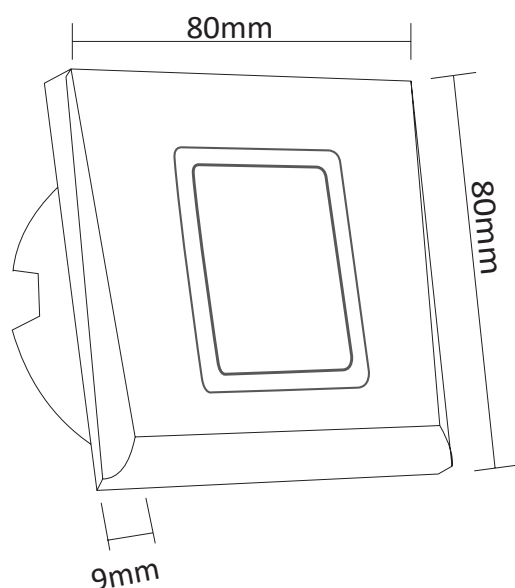


DINMTT EXIT



DINMTT ARROW

MOUNTING

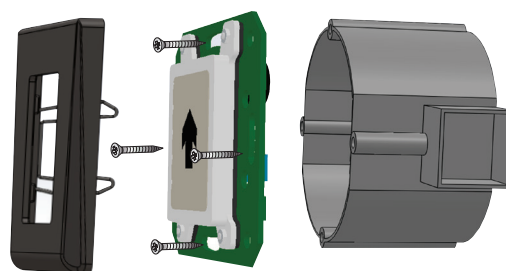

APPLICATIONS

- Light switch
- Exit button (Access control)
- Elevator button
- Industrial panel

COLOURS



DINMTTTS



DINMTTC



DINMTTW