

EX6P

KEYPAD WITH BUILT-IN PROXIMITY

Designed to operate indoors or outdoors, EX6P is available in a variety of housing options (plastic/metal) for flush and surface mounting.

The proximity keypad EX6P can be connected to the I/O board RBO408 in order to expand the number of outputs to 10 relays.



FEATURES

- 1000 User Codes/tags
- Code lengths between 1 to 8 digits
- Proximity reading type: EM 4002/4100 and HID (125kHz)
- Read range: 2 to 5 cm
- Voltage-free red and green LEDs
- All keys with backlighting
- Tamper protection
- Security: 30 s lockout after 8 consecutive invalid PIN Codes or Cards
- Two inputs for Push Buttons
- Option of Plastic or Metal keys to withstand heavy usage
- Aesthetic design suitable for a wide variety of decors

FOBS & CARDS



Ref.	PBX-1E	PBX-1C	PBX-2	PBX-2C
Features	ABS Keyfob EM4102	Leather Keyfob EM4102	0,75mm ISO Card - EM4102	2mm NISO Card - EM4102

SPECIFICATIONS

Electrical Characteristics:

- Input Voltage: 12/24 V AC/DC
- Current consumption: 150 mA max.
- Output: 2 relays
 - R1: 10 A/24 V AC/DC;
 - R2: 2 A/24 V AC/DC;
- 10 relays
 - with RBO408 I/O board

RS485 interface: Yes, for connecting I/O boards like RBO408, RTT, RU2, DINRTT

Buzzer, backlight control: Yes, via menu settings
Lighting: Backlight ON/OFF or on each keypress for 10 s

Visible LED Signal: Two voltage-free LEDs (Red & Green) and Orange LED

Audible Signal: One internal Buzzer




Environmental Characteristics:

- Operating Temperature: -25° to +50°
- Operating Humidity: 0 to 95% (non-condensing)
- Protection Standard: IP65


Mechanical Characteristics:

- Housing: ABS or sturdy die-cast aluminum alloy housing for surface mounting & Steel plate for flush mounting
- Weight: ~100 to 500 g depending on model version


DIMENSIONS




WITH A REMOTE RELAY AT A SECURED

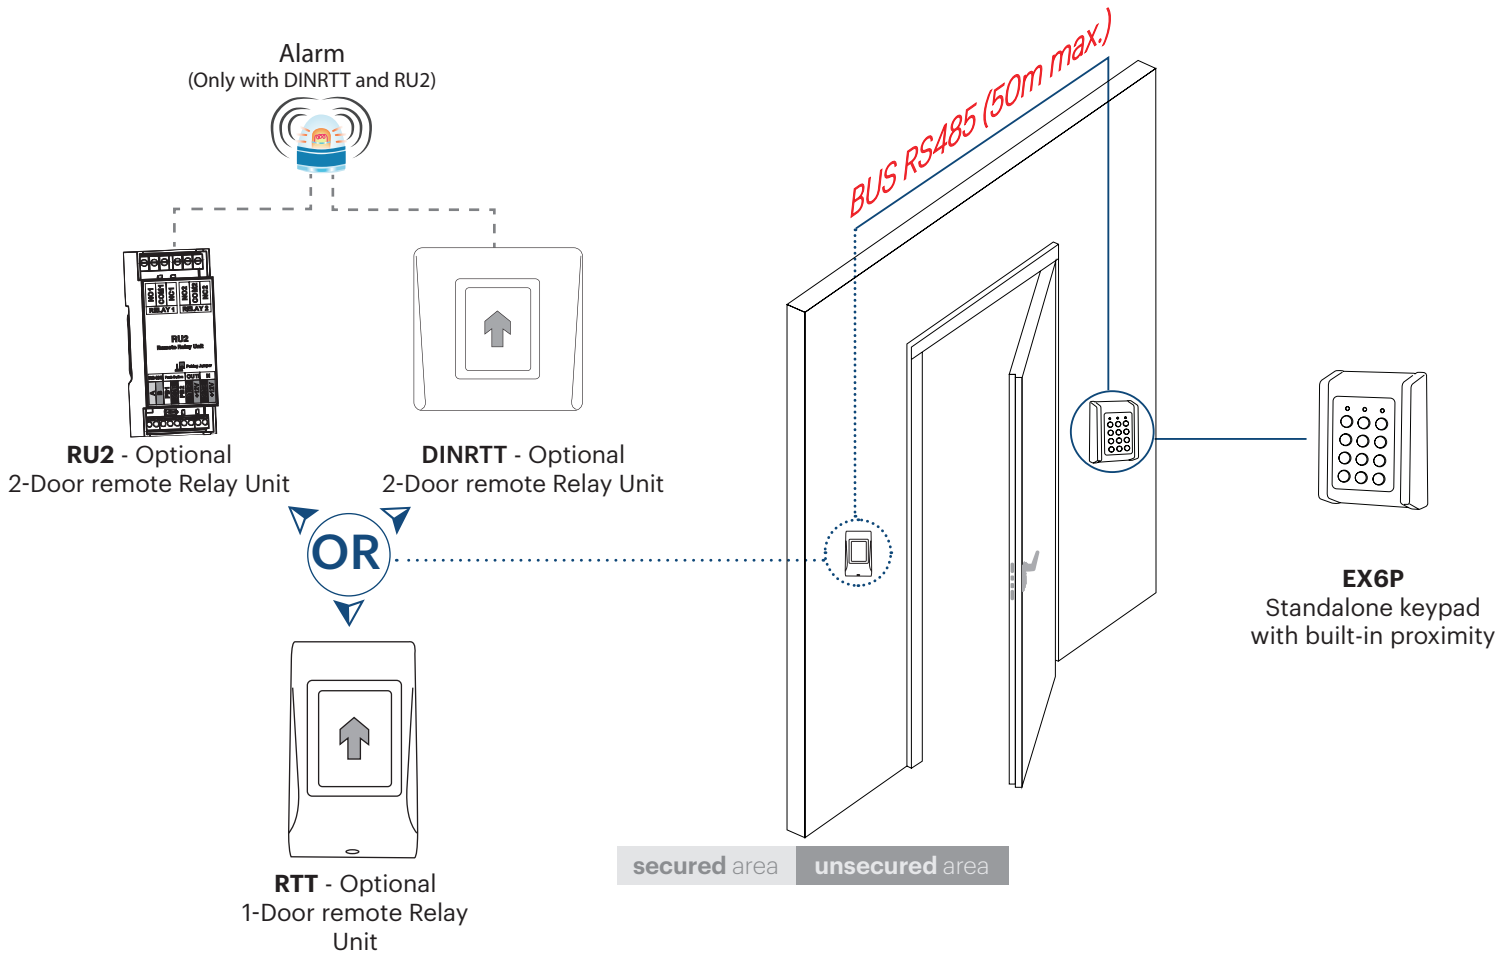

—WITH RELAY BOARD RB0408, YOU CAN EXPAND YOUR CURRENT CONFIGURATION—
BY ADDING 8 RELAYS TO YOUR 2-RELAY INSTALLATION

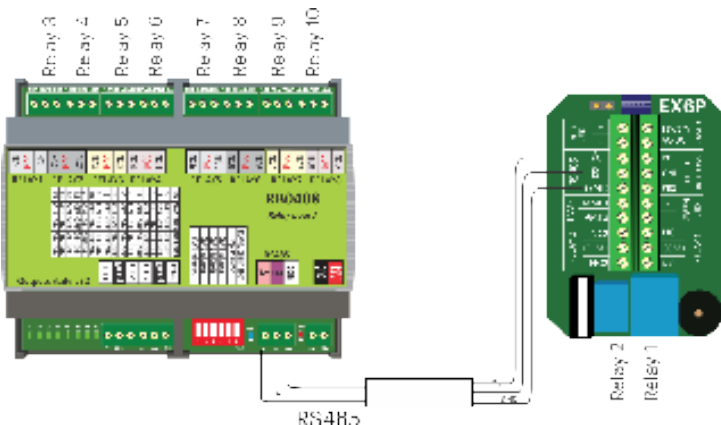

The EX6P connected to the RB0408 is perfect for small standalone installations that require more than 2 relays. The 2 relays of the EX6P + the 8 relays of the RB0408 give you the opportunity to manage up to 10 relays.



Lift solution:
max 10 floors



Cupboard solution:
max 10 drawers



Clothes shop solution:
max 10 fitting room doors