

MTPX-RS-MF

MIFARE RFID READER

Elegant and compact 13.56 MHz reader. The housing, in black ABS or silver (metal), comes with a big rectangular LED. Designed to be installed either outside or inside, it has a RS-485 bus. Its tricolor LED, tamper and buzzer are managed directly by the WS4 controllers. It can read Mifare Classic, Desfire and Ultralight.



FEATURES


- Surface mount
- Housing: ABS or metal
- Reading type: Mifare Classic, Desfire and Ultralight
- Reading distance: up to 6 cm
- Operating frequency: 13.56 MHz
- RS-485 output
- Backlight LED (red, green, orange): managed by the host *
- 1 internal buzzer (ON/OFF), managed by the host
- Tamper protection: when opened or dismantled
- Voltage: 9 - 14V DC
- Current Consumption: max 130 mA
- IP 65
- Operating temperature: -20°C to +50°C
- Operating humidity: 5% to 95% RH without condensation

WS4

RS-485

* Compatible only with our WS4 controllers

TRICOLOR LED STATUS

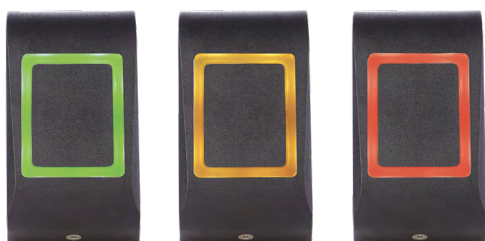


With red, green and orange LEDs, managed by the host

Green LED
Access Granted

Orange LED
Idle Mode

Red LED
Access Denied

VERSIONS



bx Black Edition

Ref: MTPXBK-RS-MF
Black - ABS



Ref: MTPXS-RS-MF
Silver - ABS

FOBS & CARDS

13.56MHz
Fobs & Cards



Ref.	PBX-1E-MS50	PBX-2-MS50	PBX-2C-MS50	PBX-2-MS70
Features	ABS Keyfob 13.56MHz - 1K memory	0.75 mm ISO Card - 13.56MHz - 1K memory	2 mm NISO Card - 13.56MHz - 1K memory	0.75 mm ISO Card - 13.56MHz - 4K memory

DIMENSIONS

