


DINMTPX-MF-SA


OFFLINE MIFARE RFID READER

DINMTPX-MF-SA is an offline reader for access control. The Reader can be configured via USB connection or via card configuration. Issuing user cards is done by the software with the help of the desktop USB card reader. The access rights are written in the user card itself. The reader is compatible with our Access (PROA MS) and Hotel (PROH MS) software. The collection of past events can be also done by USB connection or by Event collect card.

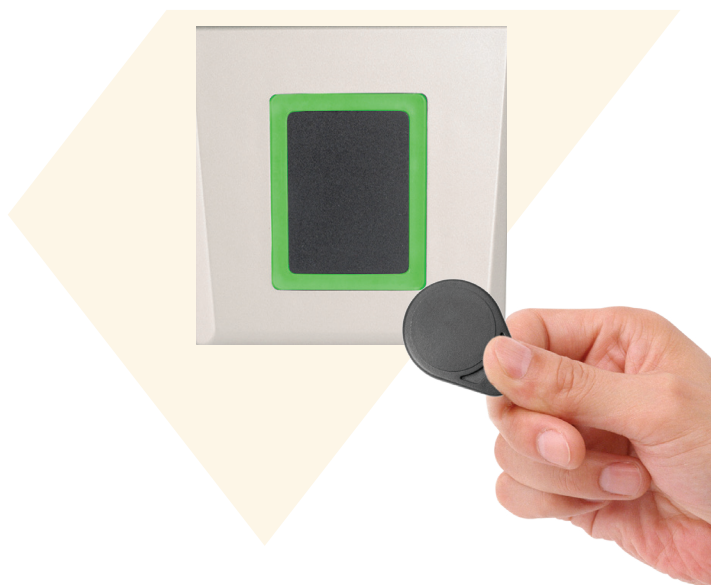

FEATURES

Mounting:	Flush
Mask material:	ABS
Reader type:	Mifare R/W
Cards supported:	Mifare Classic 1K, 4K
Read range:	Up to 6 cm
Operating frequency:	13.56 MHz
User capacity:	Unlimited
Events memory:	3500 events
Relay activation time:	Pulse mode (1 to 255 s) or Toggle mode (ON/OFF)
Reader mode:	Sector read/write
Tamper protection:	Yes
Software support:	PROH-MS, PROA-MS
Event collection:	By Event Collect Card or via USB micro connector
Blacklist capacity:	500 cards
Data connectivity:	USB micro connector
Schedule activation:	4 definable actions of lock/unlock based on the time and day of the week
Firmware upgrade:	Yes, via USB
Configuration:	By software with USB connection or programming cards created using software and USB desktop reader
Credit on card:	Yes

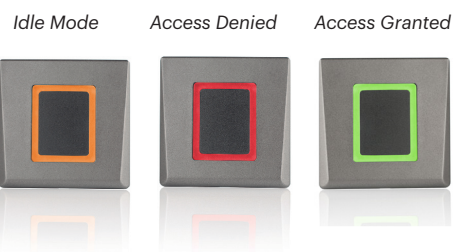

SPECIFICATIONS

Electrical Characteristics:

Operating Voltage:	12 V DC
Current consumption:	150 mA max.
Data connectivity:	Micro USB connector for standard connection to PC
Output:	1 built-in relay (2 A; 24 V AC/DC), RS-485 for remote relay unit RU2, DINRTT, RTT
Inputs:	Push button
Tamper:	Yes
Signalization:	LED, buzzer


Environmental Characteristics:

IP rating:	IP40
Operating Temperatures:	-20°C to +50°C (non-condensing)


Mechanical Characteristics:

Dimensions (mm):	80L x 80W x 9H
------------------	----------------

DIMENSIONS



MOUNTING

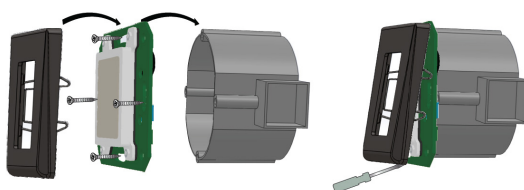


> Note: Wall mount box not supplied

COLOURS



READER CONFIGURATION


WITH USB




Micro USB connector on the front of the DINMTPX-MF-SA reader for easy programming



WITH CARD

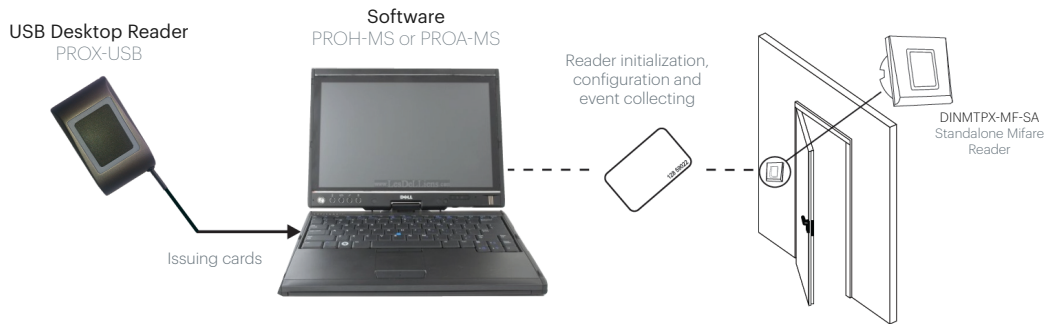


FOBS & CARDS




Ref.	PBX-1E-MS50	PBX-2-MS50	PBX-2C-MS50	PBX-2-MS70
Features	ABS Waterdrop keyfob - 13.6MHz - 1K Memory	0.75mm ISO Card - 13.6MHz - 1K memory	2mm NISO Card - 13.6MHz - 1K Memory	0.75mm ISO Card - 13.6MHz - 4K Memory

ACCESS SOLUTIONS SYSTEM > READER ONLY

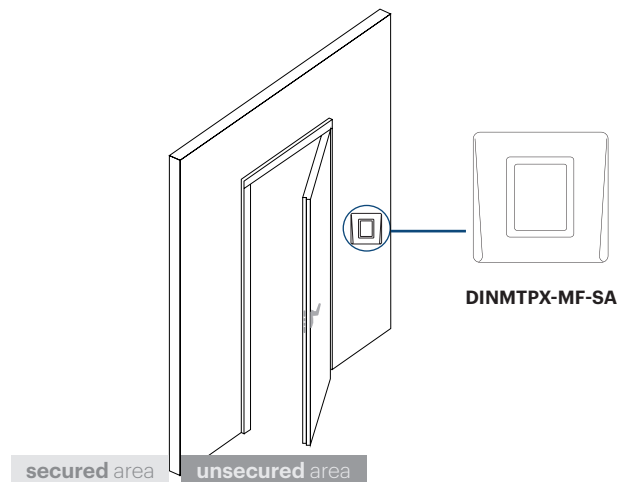


ACCESS SOLUTIONS SYSTEM > READER + REMOTE RELAY UNIT

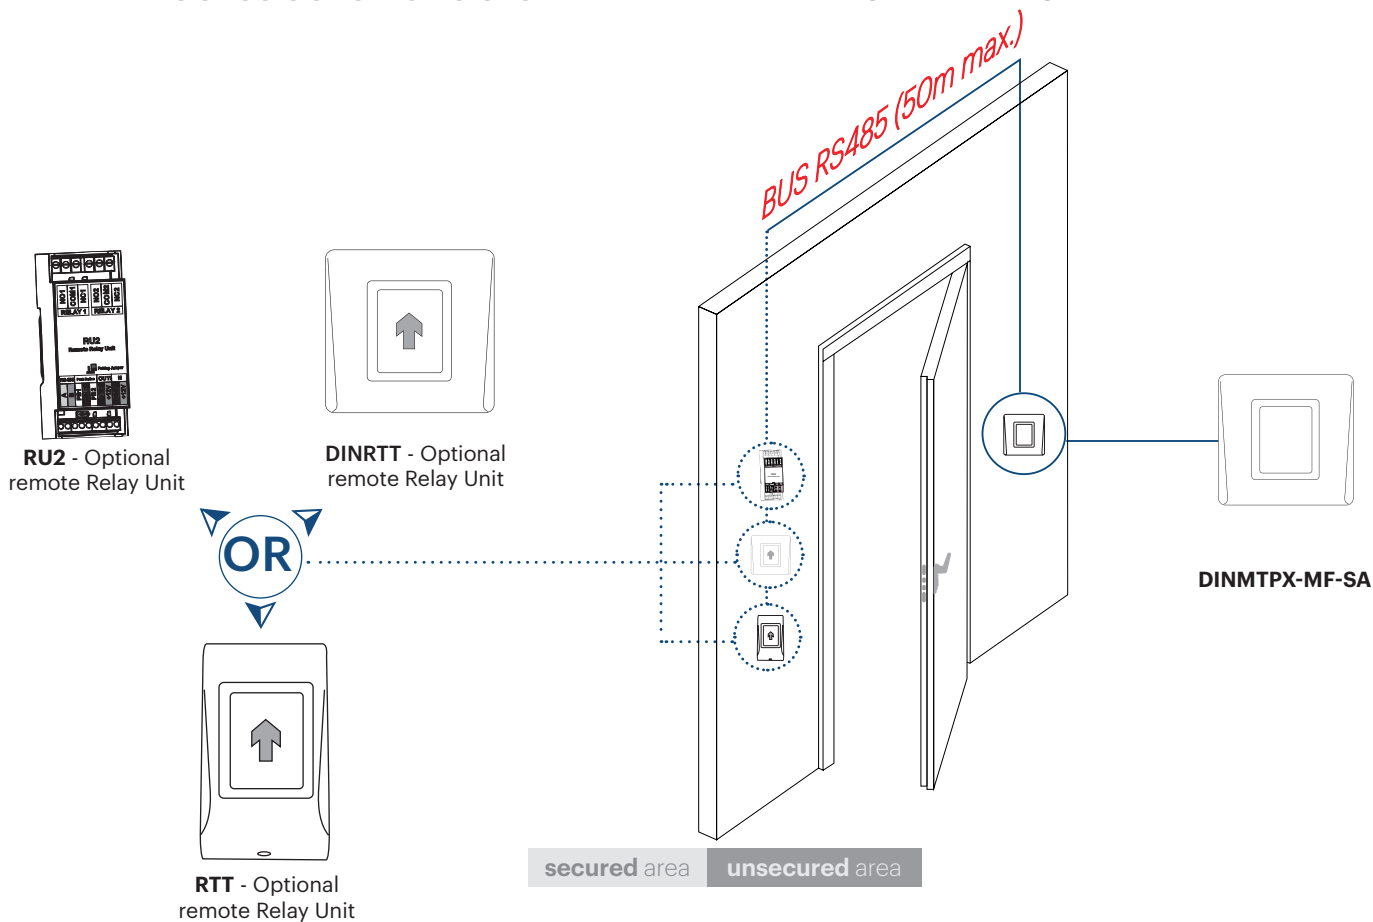

PROA-MS (ACCESS SOFTWARE)

- ▶ Management of unlimited number of separate sites
- ▶ 80 Doors(Readers) per site, unlimited number of users per site
- ▶ Unlimited access levels
- ▶ User cards programming with PROX-USB Desktop Reader
- ▶ MS Access Database
- ▶ Reports for Events, Cards, User List, System Logs
- ▶ Configuring the reader by USB connection or by creating the Setup card
- ▶ Download reader events by USB connection or card
- ▶ OS: Windows 7, 8, 10
- ▶ Compatible hardware:
 - PROX-USB desktop card Reader/Writer
 - MTPX-MF-SA standalone reader
- ▶ Multilanguage UK, FR, IT, ES, NL, DE.

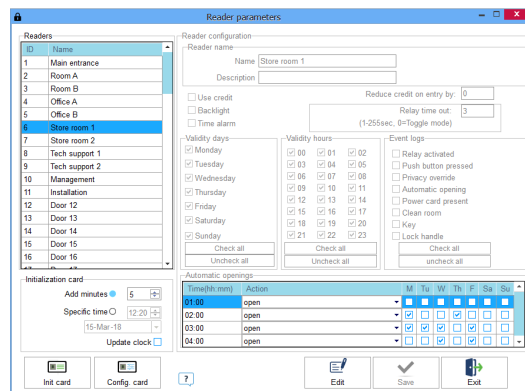

Easy to check and manage different events.

Site	Area	Reader / Time zone	1	2	3	4	5
Home	Outside	Sodie Show Room	Zona horaria1 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria2 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria3 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria4 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona ho 00:00-23 Hol Mon Tue Wed Thu Fri Sat Sun
Home	Outside	R1 - 140326033	24/7	Zona horaria1 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria2 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria3 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona ho 00:00-23 Hol Mon Tue Wed Thu Fri Sat Sun
Home	Outside	R2 - 140326033	Zona horaria1 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria2 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria3 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria4 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona ho 00:00-23 Hol Mon Tue Wed Thu Fri Sat Sun
Home	Outside	R1 - 150703073	24/7	Zona horaria1 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria2 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona horaria3 00:00-23:59 Hol Mon Tue Wed Thu Fri Sat Sun	Zona ho 00:00-23 Hol Mon Tue Wed Thu Fri Sat Sun



Option to create unlimited access levels.